

TABLE OF CONTENTS

1- RELEASE HDX REAR PEDESTAL UNPACKING – MAGNET NOT RAMPED.....2

 1-1 Requirements2

 1-2 Unpacking Procedure2

2- RELEASE HDX REAR PEDESTAL UNPACKING – MAGNET RAMPED6

 2-1 Requirements6

 2-2 Unpacking Procedure6

1- RELEASE HDx REAR PEDESTAL UNPACKING – MAGNET NOT RAMPED


1-1 Requirements

Tools: Adjustable Wrench or Socket Wrench Set
Box Cutter

Personnel: Two (2) Engineers and/or Installers

1-2 Unpacking Procedure

1. Remove the box from the wooden skid by cutting the strap and removing the fasteners along the lower edge of the box where it meets the skid.

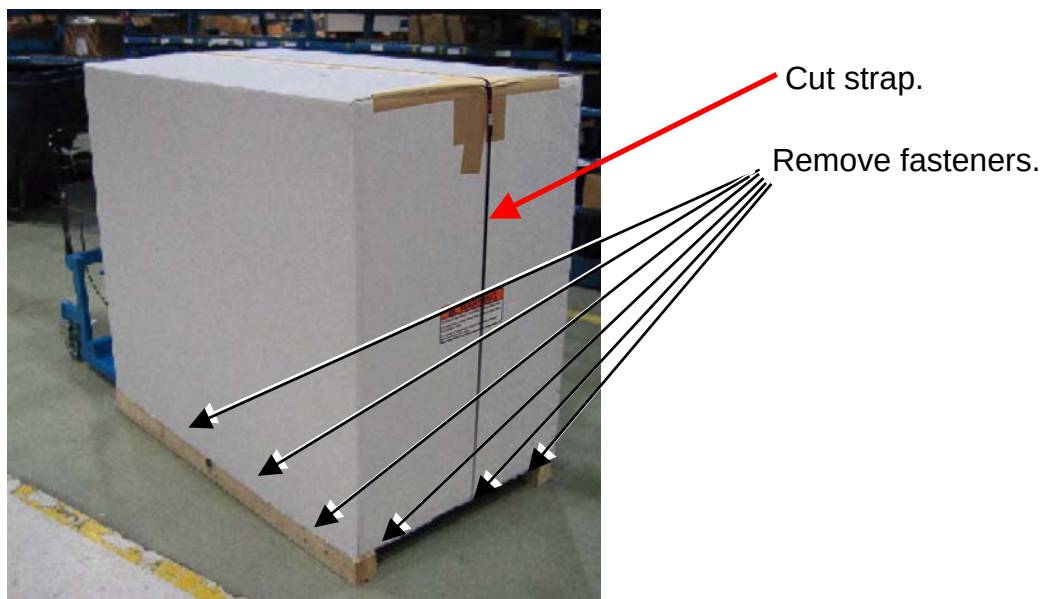

WARNING!

DO NOT REMOVE THE ANTI-SLIPPAGE FOAM FROM UNDER THE LPCA UNTIL THE REAR PEDESTAL IS IN THE FINAL POSITION AGAINST THE MAGNET.




REMOVING THE FOAM PRIOR TO POSITIONING OF THE REAR PEDESTAL WILL CREATE AN UNSTABLE CONDITION (LPCA BECOMES MOVABLE), WHICH CAN CAUSE THE REAR PEDESTAL TO TIP.

2. Position the wooden skid outside the Magnet Room doorway so the ramp will bridge across the room door threshold into the Magnet Room as shown below.
3. Unband the ramp and remove all the packing material under the LPCA except the anti-slippage foam.



Unfold ramp into position.

4. Remove the four (4) bolts fastening the assembly to the skid.

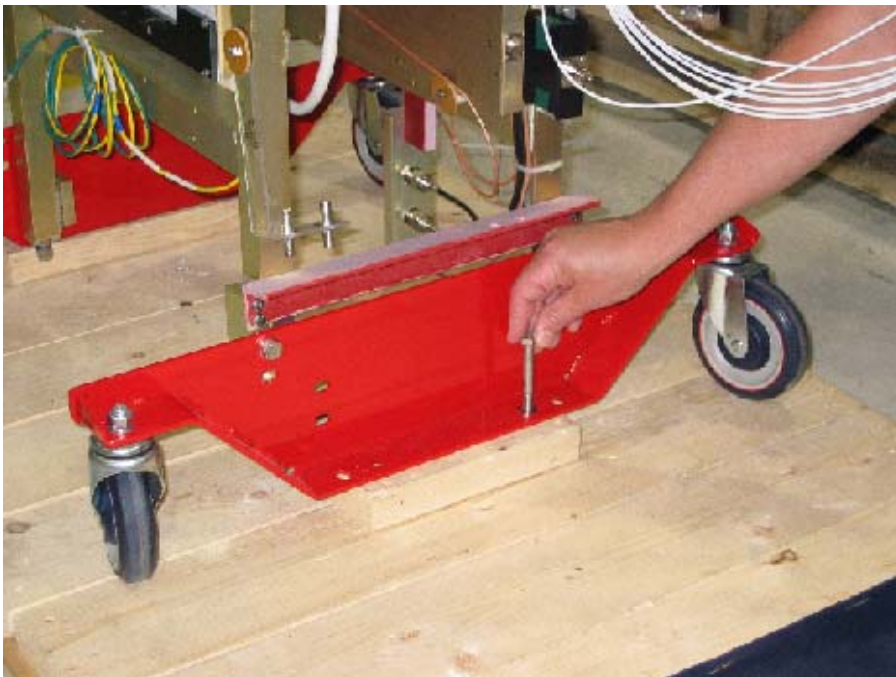

5. With a person at each end, roll the pedestal off the skid and into position behind the magnet.


6. Using an adjustable wrench, lower the pedestal feet until the wheels are approximately 1/16 inch off the floor.




7. Remove the two (2) bolts attaching each wheel bracket to the pedestal.



8. Remove the three (3) bolts attaching each split bridge shipping bracket to the pedestal and split bridge.

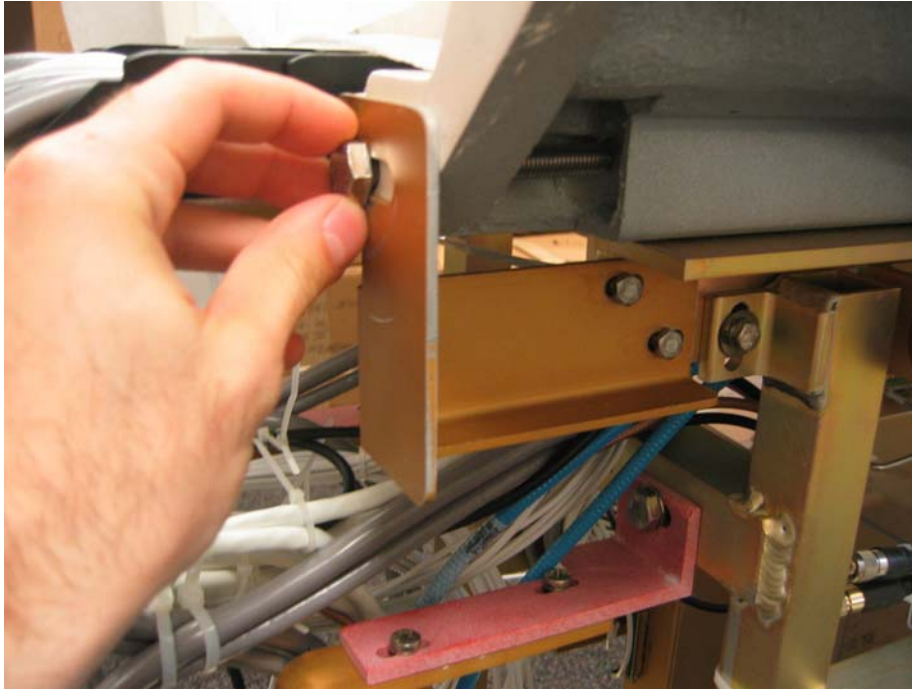

9. Remove the anti-slippage foam from the rear pedestal.

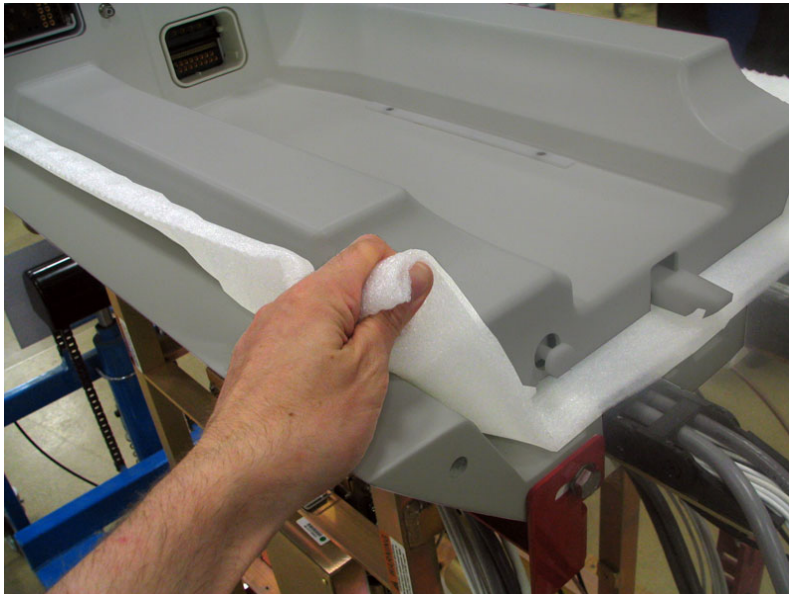

10. Follow the appropriate installation procedure to complete the rear pedestal installation.

Notes: After completing this unpacking procedure, the pedestal may need to be lowered to mate properly with the front bridge.

All shipping brackets, packing material and skid are to be disposed of locally.

2- RELEASE HDX REAR PEDESTAL UNPACKING – MAGNET RAMPED


2-1 Requirements

Tools: Adjustable Wrench or Socket Wrench Set
Box cutter

Personnel: Four (4) Engineers and/or Installers

2-2 Unpacking Procedure

1. Remove the box from the wooden skid by cutting the strap and removing fasteners along the lower edge of the box where it meets the skid.

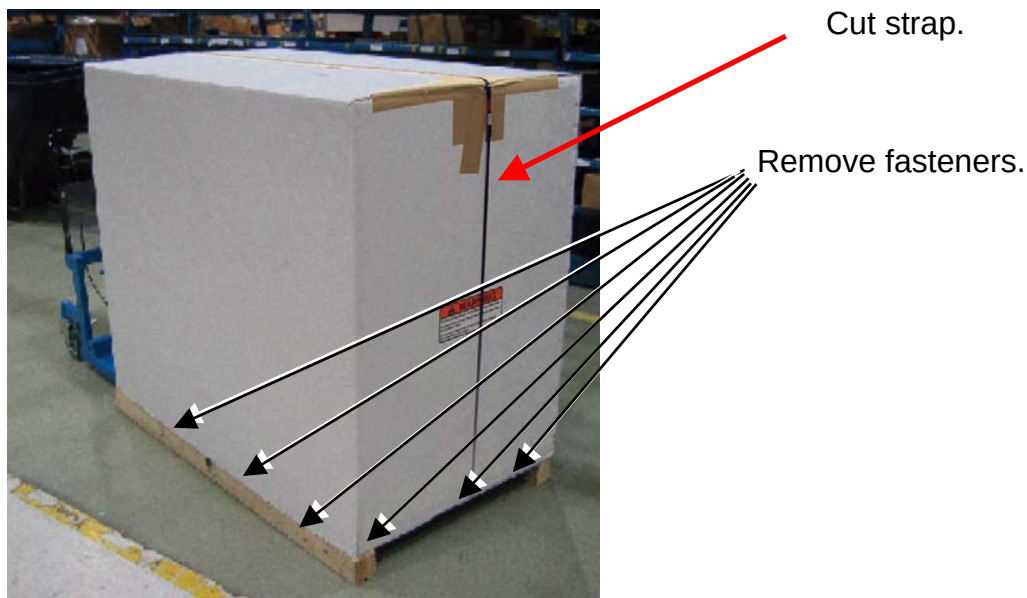


WARNING!

DO NOT REMOVE THE ANTI-SLIPPAGE FOAM FROM UNDER THE LPCA UNTIL THE REAR PEDESTAL IS IN THE FINAL POSITION AGAINST THE MAGNET.




REMOVING THE FOAM PRIOR TO POSITIONING OF THE REAR PEDESTAL WILL CREATE AN UNSTABLE CONDITION (LPCA BECOMES MOVABLE), WHICH CAN CAUSE THE REAR PEDESTAL TO TIP.

2. Position the wooden skid outside, but close to the Magnet Room doorway.
3. Unband the ramp and remove all the packing material under the LPCA except the anti-slipage foam.

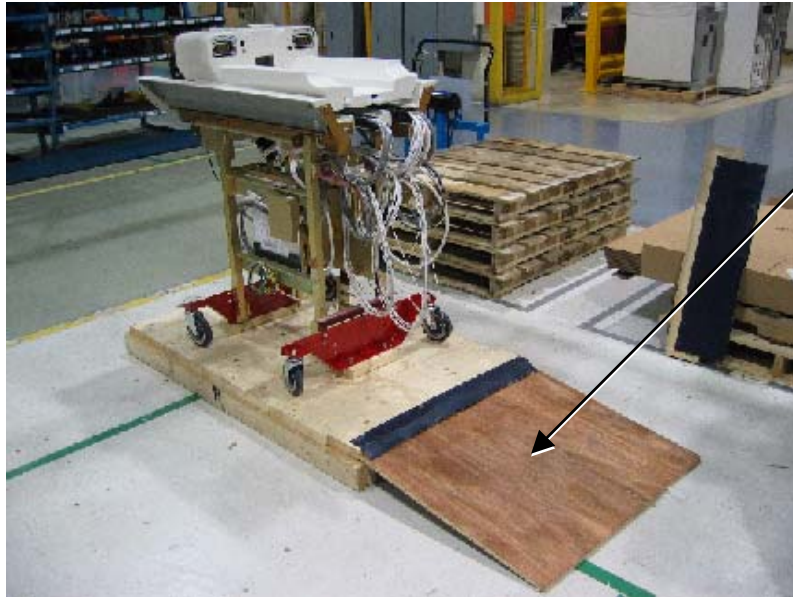

4. Remove the four (4) bolts fastening the assembly to the skid.

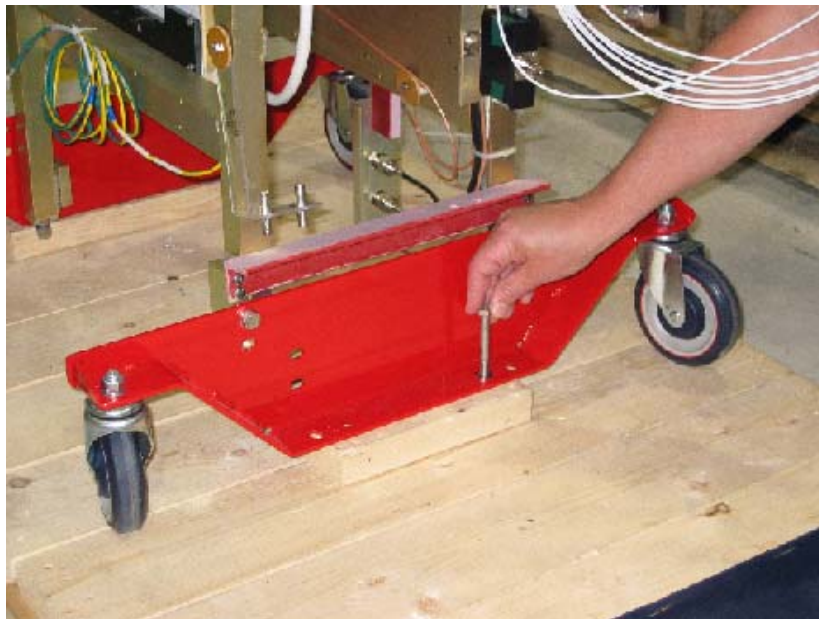

5. Using an adjustable wrench, lower the pedestal feet until the feet touch the wooden skid.



6. Remove the wheel brackets by removing the two (2) bolts attaching each bracket to the rear pedestal.

WARNING!

THE WHEEL/BRACKET ASSEMBLY CONTAINS FERROUS MATERIAL. DO NOT BRING THE WHEEL/BRACKET ASSEMBLY INTO THE MAGNET ROOM WHEN THE MAGNET IS RAMPED.

FERROUS OBJECTS ARE STRONGLY ATTRACTED TO THE MAGNET AND MAY BECOME DANGEROUS PROJECTILES. KEEP ALL FERROUS MATERIAL AND TOOLS AT LEAST 10 FEET AWAY FROM THE MAGNET.




7. **Using four (4) people**, grasp the rear pedestal at the bars just below the bridge assembly. Carry the rear pedestal into the magnet room and place it in position behind the magnet.


WARNING!

THE DRIVE MOTOR CONTAINS FERROUS MATERIAL. MAINTAIN MAXIMUM DISTANCE BETWEEN THE MAGNET AND THE REAR PEDESTAL ASSEMBLY WHILE MOVING THE PEDESTAL ASSEMBLY INTO POSITION. ALWAYS POSITION THE DRIVE MOTOR AS FAR AWAY FROM THE MAGNET AS POSSIBLE.


Lift the pedestal
using the bar on
each side. Four (4)
people are required
for this procedure.

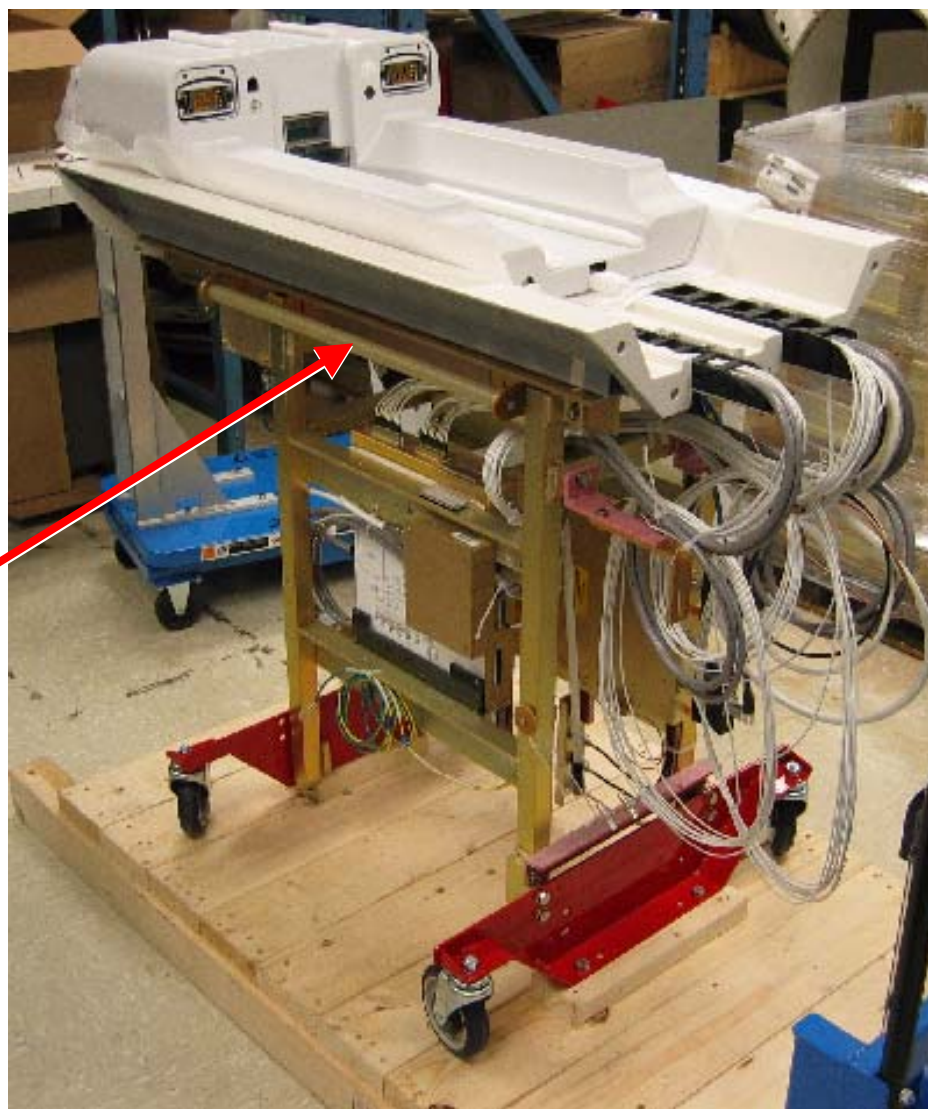

8. Remove the three (3) bolts attaching each split bridge shipping bracket to the pedestal and split bridge.

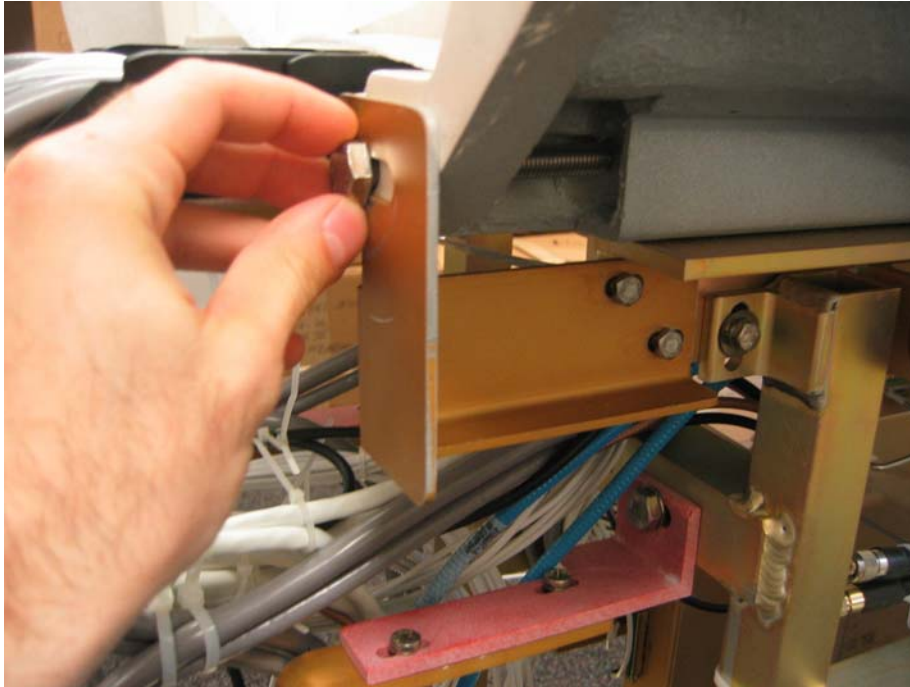

9. Remove the anti-slippage foam from the rear pedestal.

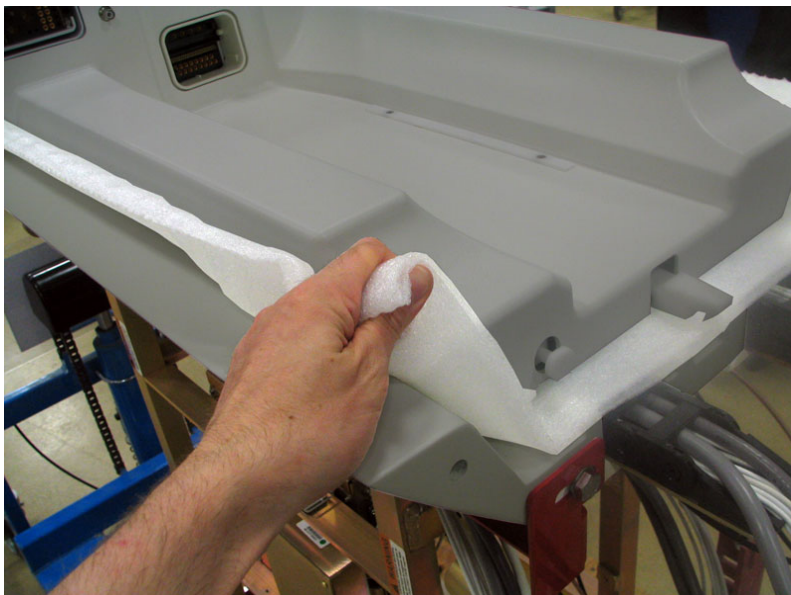

10. Follow the appropriate installation procedure to complete the rear pedestal installation.

Notes: After completing this unpacking procedure, the pedestal may need to be lowered to mate properly with the front bridge.

All shipping brackets, packing material and skid are to be disposed of locally.

REVISION HISTORY

REV	DATE	AUTHOR	PRIMARY REASONS FOR CHANGE
1	Aug 30, 2005		Initial version.
2	March 22, 2006	Pete Kargard Eric Nelson	Added Warning on pages 2 and 6. Added Revision History page.
3	April 10, 2006	Eric Nelson	Corrected Page Numbers
4	April 24, 2006	Eric Nelson	Updated Step 1 to reflect Forward Production of Attachment of the Box to the skid, and added box cutter to Tools Requirement. In the Warning, changed: “...hardware that secures the LPCA to the bridge...” to “...anti-slippage foam from under the LPCA...” Added Step 8, indicating removal of the anti-slippage foam. (These changes are reflected in Sections 1 and 2.)