

6-4-9 System Cooling Cabinet With Remote Condenser Unit Additional Interconnects


The SCC with RCU requires the interconnects defined in this section in addition to the interconnects in Section 6-4 SYSTEM INTERCONNECTS.

Installation of the RCU must be in accordance with local and national codes for electrical and according to standard accepted refrigeration practices (i.e. proper traps in lines). The following recommendations should be adhered to:

- Use only refrigeration grade copper tubing.
- Soft solder joints are not acceptable
- Put dry nitrogen through lines while brazing.
- Do not leave dehydrated piping or components open to the atmosphere any longer than absolutely necessary.

Note

Refer to **Section 2-7-1 System Cooling Cabinet Subsystem Equipment** Table 2-5 for listing of responsibility for the specific installation tasks. Also refer to Ellis & Watts *Technical Publication 468 Pre installation/Installation/Operating LC 20M/RAC Chilled Water System for GE Signa OpenSpeed MRI Equipment* for additional SCC with RCU information and details.

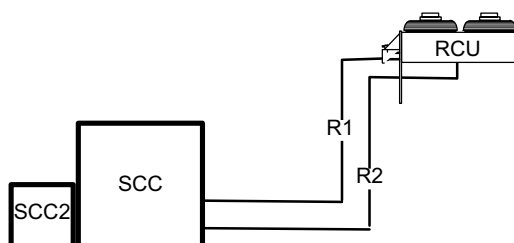

REMOTE CONDENSER UNIT & SYSTEM COOLING CABINET CUSTOMER PROVIDED INTERCONNECTS
ILLUSTRATION 6-10

TABLE 6-10
CUSTOMER PROVIDED REMOTE CONDENSER UNIT INTERCONNECT LIST

GROUP NUMBER	GROUP AREA in. ² (mm ²)	BETWEEN UNITS		USABLE LENGTH ft (m)	RUN NUMBER	CABLE DIAMETER in. (mm)	PLUG PULLING DIAMETER X LENGTH in. (mm)		NOTES
R1	1.595* (1029)*	SCC	RCU	See Note 1	gas	1.125* (28.6)*	refrigeration tubing	refrigeration tubing	RCU is supplied with sweat fittings on the SCC and RCU. Refer to Illustrations 2-15 and 2-16. Refrigeration tubing is Customer Supplied.
					liquid	0.875* (22.2)	refrigeration tubing	refrigeration tubing	
R2		SCC	RCU	See Note 1	power	0.064 See Note 2	hard wired	hard wired	At RCU Customer Supplied power wiring is connected to Lock Out /Tag Out Breaker Box supplied and installed on the unit.
Note * Dimension values are estimated, need to determine dimensions for customer supplied materials. 1 The SCC and RCU must not be separated by a distance greater than 200 ft (61 m) of customer provided refrigeration tubing. The vertical separation must not exceed 100 ft (30.5 meter) for the RCU above the SCC and 10 ft (3 m) if for the RCU is below the SCC. 2 Customer provided power wire from SCC to RCU must be 14 AWG (25 mm ²) minimum with actual wire size to be determined by customer/contractor dependent on total run length. RCU power demands for are Start-up 10 Amps and Full Load 3.7 Amps for 2 fans (1@1/3 hp 1.3 FLA and 1@3/4 hp 2.4 FLA). Refer to vendor manual for additional information .									